
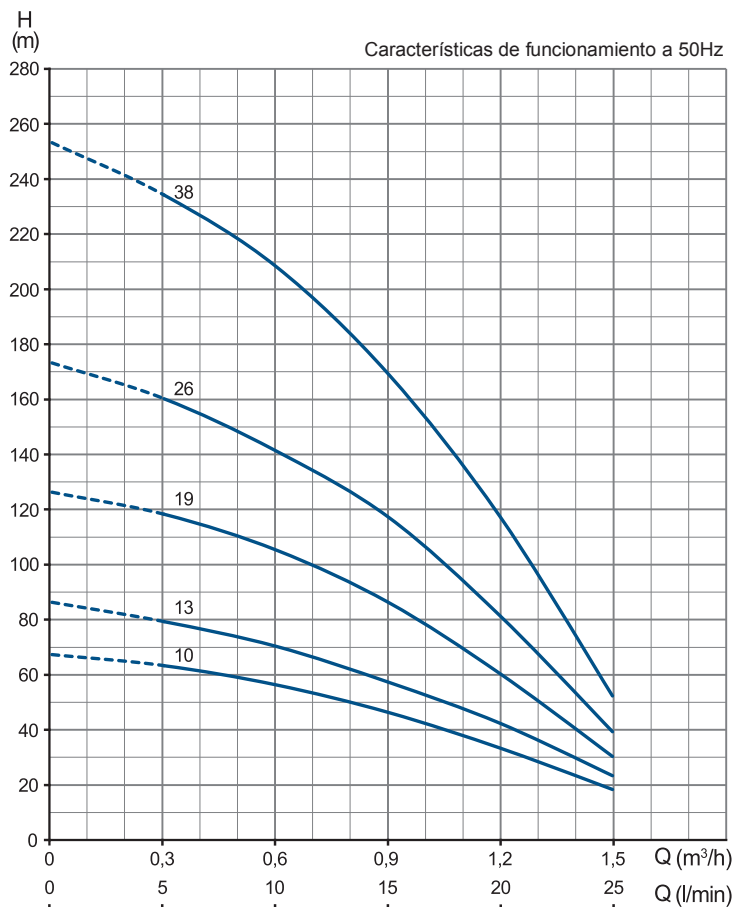


DS 4

01

01

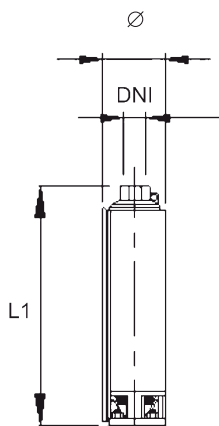

Dimensiones y pesos

| Tipo de Bomba | DNI | (mm) | | Peso (kg) |
|---------------|--------|------|-----|-----------|
| | | Ø | L1 | |
| DS4 01 10 | 1 1/4" | 98 | 324 | 3,3 |
| DS4 01 13 | | 98 | 377 | 3,7 |
| DS4 01 19 | | 98 | 481 | 4,7 |
| DS4 01 26 | | 98 | 642 | 5,8 |
| DS4 01 38 | | 98 | 864 | 8,2 |

Ø Máximo diámetro de bomba incluido cubrecable y motor

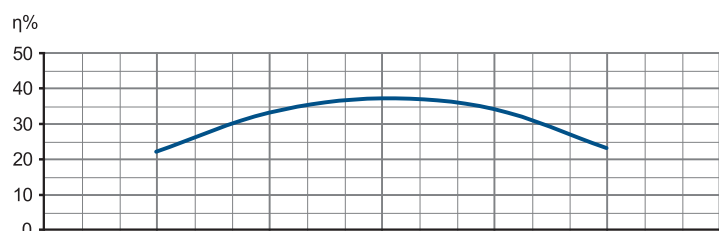


Tabla de selección

| Tipo de Bomba | Etapas | P ₂ | | l/min m ³ /h | Q (l/min) | | | | | |
|---------------|--------|----------------|------|-------------------------|-----------|-----|-----|-----|-----|----|
| | | KW | HP | | 0 | 5 | 10 | 15 | 20 | 25 |
| DS4 01 10 | 10 | 0,37 | 0,5 | mca | 67 | 63 | 55 | 46 | 33 | 18 |
| DS4 01 13 | 13 | 0,37 | 0,5 | | 86 | 78 | 70 | 56 | 42 | 23 |
| DS4 01 19 | 19 | 0,55 | 0,75 | | 126 | 118 | 105 | 86 | 60 | 30 |
| DS4 01 26 | 26 | 0,75 | 1 | | 173 | 160 | 141 | 118 | 81 | 39 |
| DS4 01 38 | 38 | 1,1 | 1,5 | | 253 | 234 | 208 | 169 | 117 | 52 |

Las prestaciones son válidas para líquidos con una densidad de $\rho = 1,0 \text{ kg/dm}^3$ y una viscosidad cinemática de $\nu = 1 \text{ mm}^2/\text{s}$.