


DS 4

04

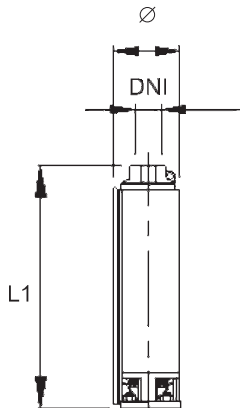

Dimensiones y pesos

Tipo de Bomba	DNI	(mm)		Peso (kg)
		Ø	L1	
DS4 04 04	1 1/2"	98	247	2,4
DS4 04 06		98	296	2,9
DS4 04 08		98	345	3,3
DS4 04 12		98	433	4,1
DS4 04 16		98	542	5,0
DS4 04 24		98	777	6,6
DS4 04 32		98	965	8,7
DS4 04 40		98	1160	10,4
DS4 04 44		98	1296	11,2

Ø Máximo diámetro de bomba incluido cubrecable y motor

Tabla de selección

Tipo de Bomba	Etapas	P ₂		l/min m ³ /h	0	35	40	45	50	60	70	80	90	100
		KW	HP		0	2,1	2,4	2,7	3	3,6	4,2	4,8	5,4	6
DS4 04 04	4	0,37	0,5	mca	26	23	22	22	21	19	17	14	11	7
DS4 04 06	6	0,55	0,75		38	36	35	33	32	30	26	22	18	12
DS4 04 08	8	0,75	1		51	47	46	44	43	39	35	30	24	18
DS4 04 12	12	1,1	1,5		77	72	71	69	68	63	57	49	41	31
DS4 04 16	16	1,5	2		102	98	96	94	92	86	77	68	57	46
DS4 04 24	24	2,2	3		151	142	139	136	132	122	111	97	80	62
DS4 04 32	32	3	4		203	188	185	180	175	162	146	127	105	80
DS4 04 40	40	3,7	5		253	232	228	222	216	202	182	159	131	102
DS4 04 44	44	4	5,5		278	265	260	254	247	230	210	187	159	127

Las prestaciones son válidas para líquidos con una densidad de $\rho = 1,0 \text{ kg/dm}^3$ y una viscosidad cinemática de $\nu = 1 \text{ mm}^2/\text{s}$.

