
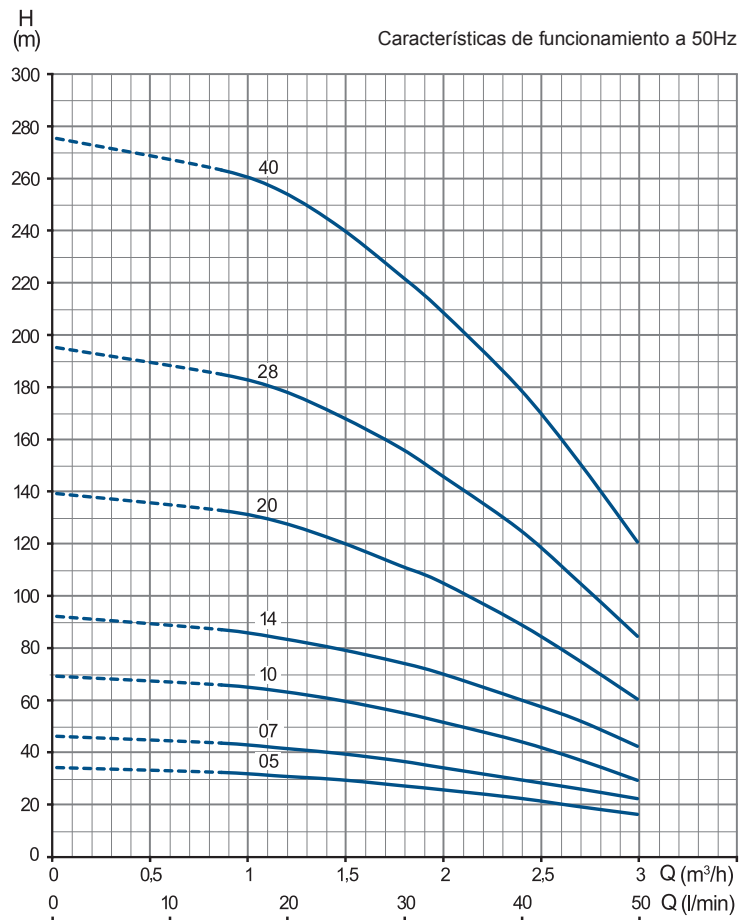


DS 4


02

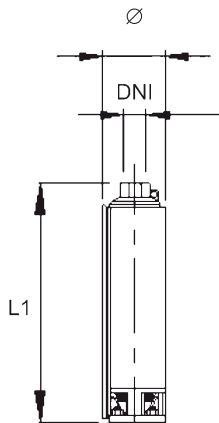

01

Dimensiones y pesos

Tipo de Bomba	DNI	(mm)		Peso (kg)
		Ø	L1	
DS4 02 05	1 ^{1/4} "	98	236	2,5
DS4 02 07		98	271	2,8
DS4 02 10		98	324	3,3
DS4 02 14		98	394	3,9
DS4 02 20		98	499	4,9
DS4 02 28		98	680	6,9
DS4 02 40		98	885	9,3

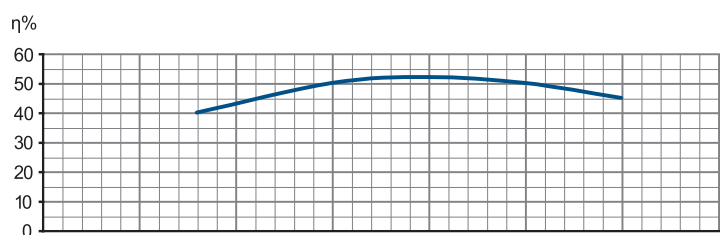

Ø Máximo diámetro de bomba incluido cubrecable y motor

Tabla de selección

Bomba	Etapas	P ₂		l/min m³/h	Q (m³/h)									
		KW	HP		0	15	20	25	30	35	40	45	50	
DS4 02 05	5	0,37	0,5	mca	34	32	31	29	27	25	23	19	16	
DS4 02 07	7	0,37	0,5		46	43	42	39	36	33	29	26	22	
DS4 02 10	10	0,55	0,75		69	65	63	60	55	50	44	37	29	
DS4 02 14	14	0,75	1		92	86	83	79	74	67	60	52	42	
DS4 02 20	20	1,1	1,5		139	131	127	120	111	101	90	75	60	
DS4 02 28	28	1,5	2		195	183	178	168	155	141	126	105	84	
DS4 02 40	40	2,2	3		275	262	254	240	222	202	180	150	120	

Las prestaciones son válidas para líquidos con una densidad de $\rho = 1,0 \text{ kg/dm}^3$ y una viscosidad cinemática de $\nu = 1 \text{ mm}^2/\text{s}$.