
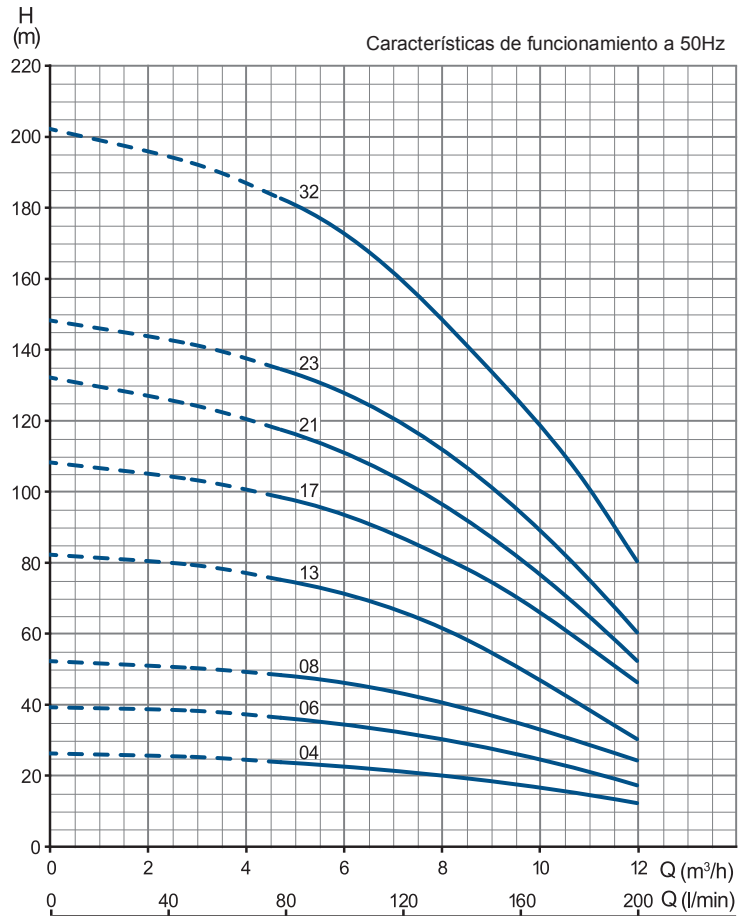


DS 4


08

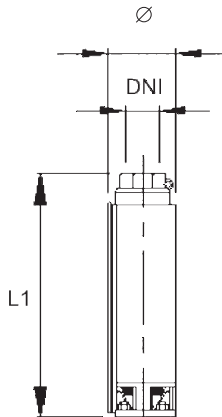

01

Dimensiones y pesos

Tipo de Bomba	DNI	(mm)		Peso (kg)
		Ø	L1	
DS4 08 04	2"	98	294	2,8
DS4 08 06		98	356	3,4
DS4 08 08		98	418	4,0
DS4 08 13		98	573	5,5
DS4 08 17		98	697	6,6
DS4 08 21		98	859	7,8
DS4 08 23		98	921	8,4
DS4 08 32		98	1238	11,0

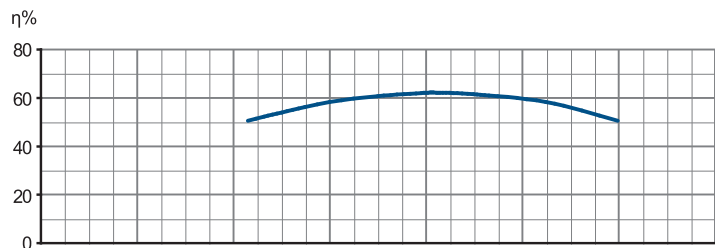

Ø Máximo diámetro de bomba incluido cubrecable y motor

Tabla de selección

Tipo de Bomba	Etapas	P ₂		l/min m³/h	0	80	90	100	120	140	160	180	200
		KW	HP		0	4,8	5,4	6	7,2	8,4	9,6	10,8	12
DS4 08 04	4	0,75	1	mca	26	24	23	22	21	19	17	15	12
DS4 08 06	6	1,1	1,5		39	36	35	34	32	29	26	22	17
DS4 08 08	8	1,5	2		52	48	47	46	43	39	35	29	24
DS4 08 13	13	2,2	3		82	75	73	71	66	59	50	40	30
DS4 08 17	17	3	4		108	98	96	94	87	79	70	58	46
DS4 08 21	21	3,7	5		132	117	114	111	103	93	82	68	52
DS4 08 23	23	4	5,5		148	134	131	127	118	108	95	79	60
DS4 08 32	32	5,5	7,5		202	182	178	172	160	143	125	105	80

Las prestaciones son válidas para líquidos con una densidad de $\rho = 1,0 \text{ kg/dm}^3$ y una viscosidad cinemática de $\nu = 1 \text{ mm}^2/\text{s}$.